


- **CLAY COATED TWO SIDES**
- **FILLED HDPE FILM**
- **CAVITATED CORE (DENSITY=0.8g/cm³)**
- **SIMULTANEOUS BIAXIAL ORIENTATION**

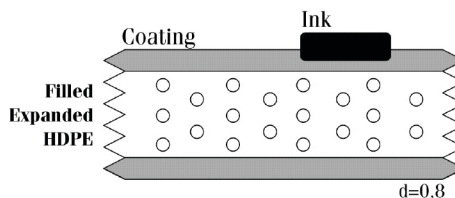

Property		Method	Units	Polyart Range					
Weight		DIN 53352	g/m ²	75	90	110	140	170	200 240
Thickness		DIN 53370	µm	95	110	140	175	215	250 300
Density			g/cm ³	0.8	0.8	0.8	0.8	0.8	0.8
Whiteness		ISO 2470	%	90	90	90	90	90	90
Opacity		DIN 53146	%	92	94	95	97	98	98 98
Tensile Strength	MD	DIN 53455	N/mm ²	45	45	43	40	38	34 34
	TD			35	35	35	32	30	28 28
Elongation @ Break	MD	DIN 53455	%	120	120	120	130	130	130 150
	TD			130	130	130	130	120	120 140
Tear Strength	MD	ASTM	N/mm	84	82	80	82	84	83 85
	TD	D1004-66		109	106	105	107	108	100 110

Features and Benefits

- Excellent stiffness for conversion and automatic label dispensing
- Good opacity
- Excellent thermal transfer printing with a very wide range of ribbons
- Excellent printing and ink drying by conventional printing methods
- Die-cuts extremely well
- No static issues
- High dimensional stability
- Resistant to a wide range of chemicals
- Recyclable with other polyolefins